

**battery type:** Lithium - Iron Disulfide  
**battery size:** IEC: FR6; ANSI: AA; L91; Mignon  
**chemical system:** Li-FeS<sub>2</sub>

**Conditions**

**nominal voltage:** 1.5 V  
**open circuit voltage:** 1.75...1.85 V new battery  
 1.70...1.85 V after 1 year storage at 20°C

**capacity rated:** 3000 mAh all measurements at 20°C ambient discharge at 75ohms load; 24hours/day End Voltage (EV): 0.9V  
 minimum: 2850 mAh discharge at 35mA constant current End Voltage (EV): 0.8V  
 2700 mAh discharge at 1000mA const. current End Voltage (EV): 0.8V

**typical service output (new batteries)**

≥ 960 cycles discharge at 1000mA; EV: 0.9V discharge 10s/m 1h/d  
 ≥ 84 h load resistor: 43ohms; EV: 0.9V discharge 4h/d  
 ≥ 170 min discharge at 1000mA; EV: 0.9V discharge 24h/d  
 ≥ 20.3 h load resistor: 10ohms; EV: 0.9V discharge 24h/d  
 ≥ 12.0 h discharge at 250mA; EV: 0.9V discharge 1h/d

**internal resistance:** ≤ 350 mΩ at 1kHz, sine wave measurement full battery

**max. discharge current:** 2000 mA continuous  
 3000 mA pulse

**shelf life:** 10 years under proper storage conditions

**leakage resistance over discharge:** no leakage 10ohms continuous discharge for 48h; ta: 20°C; RH: 60±15%  
 high temperature: no leakage store 20days at ta: 60°C; RH:90±5%


**ambient temperature range:** - 40...60 °C

**recommended storage conditions:** -20....40 °C ambient temperature  
 45...75 % rel. humidity





**mechanical specifications**

**washer:** no, without white washer

**cell dimensions**  
 diameter d1: 14.3 - 0.4 mm  
 diameter d2: 5.2 - 0.5 mm  
 height h1: 50.4 - 0.4 mm  
 height h2: 1.7 - 0.5 mm  
 weight: 15 ± 2 g



**blister card dimensions:** 172 x 123 mm  
**weight (incl. batteries):** 135 ± 10 g

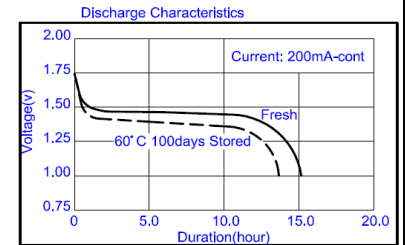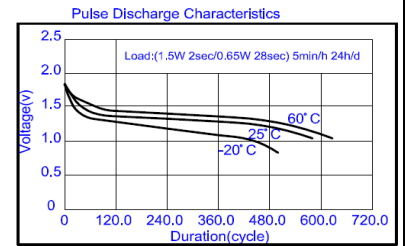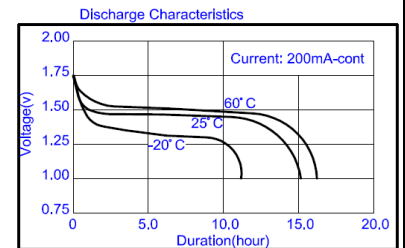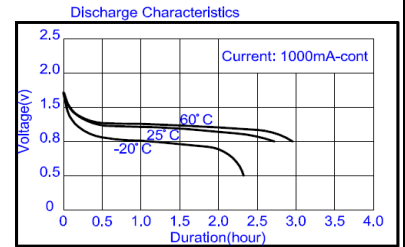

	<b>ANSMANN Specifications for model:</b>	<b>Ansmann Lithium Battery</b>
		<b>AA - size 8pcs blister package</b>
	data sheet no. / part no.	1512-0012
	supplier no.	703331
	author / date	AC / 16.12.2014