


Specification

Code:460-6095

Nominal Voltage	12V
Nominal Capacity(20HR)	25.0AH
Dimensions	Length 166±2mm (6.54 inches)
	Width 175±2mm (6.89 inches)
	Container Height 125±2mm (4.92 inches)
	Total Height (with Terminal) 125±2mm (4.92 inches)
	Approx Weight 7.2 kg (15.88lbs)
Terminal	T3 / T12
Container Material	ABS
Rated Capacity	25.0 AH/1.25A (20hr, 1.80V/cell, 25°C/77°F)
	23.2 AH/2.32A (10hr, 1.80V/cell, 25°C/77°F)
	21.3 AH/4.25A (5hr, 1.75V/cell, 25°C/77°F)
	19.1 AH/6.37A (3hr, 1.75V/cell, 25°C/77°F)
	15.7 AH/15.7A (1hr, 1.60V/cell, 25°C/77°F)
Max. Discharge Current	375A (5s)
Internal Resistance	Approx 14mΩ
Operating Temp. Range	Discharge : -15~50°C (5~122°F)
	Charge : 0~40°C (32~104°F)
	Storage : -15~40°C (5~104°F)
Nominal Operating Temp. Range	25±3°C (77±5°F)
Cycle Use	Initial Charging Current less than 7.5A. Voltage 14.4V~15.0V at 25°C(77°F)Temp. Coefficient -30mV/°C
	No limit on Initial Charging Current Voltage 13.5V~13.8V at 25°C(77°F)Temp. Coefficient -20mV/°C
Capacity affected by Temperature	40°C (104°F) 103%
	25°C (77°F) 100%
	0°C (32°F) 86%
Self Discharge	CT series batteries may be stored for up to 6 months at 25°C(77°F) and then a freshening charge is required. For higher temperatures the time interval will be shorter.

Applications

- ◆ Emergency backup power supply
- ◆ Emergency light
- ◆ Railway signal
- ◆ Aircraft signal
- ◆ Alarm and security system
- ◆ Electronic apparatus and equipment
- ◆ Communication power supply
- ◆ DC power supply
- ◆ Auto control system

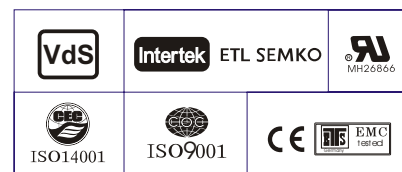

Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	47.6	36.6	30.3	26.1	20.2	14.9	12.6	7.44	5.81	4.73	3.85	3.34	2.70	2.25	1.24
1.80V/cell	63.9	46.7	36.6	30.9	23.9	17.4	14.1	8.11	6.26	5.05	4.14	3.59	2.86	2.32	1.25
1.75V/cell	72.1	51.4	40.0	33.3	24.8	18.0	14.7	8.42	6.37	5.17	4.25	3.69	2.92	2.39	1.26
1.70V/cell	79.4	55.9	42.7	35.0	25.8	18.7	15.2	8.62	6.55	5.30	4.35	3.76	2.96	2.44	1.28
1.65V/cell	87.5	60.4	45.4	37.2	27.2	19.2	15.6	8.75	6.83	5.48	4.48	3.84	3.00	2.49	1.30
1.60V/cell	96.5	65.5	48.5	39.6	28.7	20.0	15.7	9.12	7.04	5.66	4.62	3.93	3.03	2.51	1.31





Constant Power Discharge (Watts) at 25 °C (77°F)

F.V/Time	5min	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	87.1	67.5	56.6	49.4	38.5	28.6	24.3	14.5	11.4	9.25	7.56	6.58	5.33	4.46	2.45
1.80V/cell	115.6	85.3	67.4	57.5	44.8	33.1	27.0	15.6	12.1	9.82	8.08	7.03	5.64	4.59	2.47
1.75V/cell	127.6	92.2	72.7	61.2	46.1	34.0	28.1	16.1	12.3	10.0	8.26	7.20	5.72	4.71	2.49
1.70V/cell	136.6	98.2	76.5	63.9	47.8	35.2	29.0	16.6	12.6	10.2	8.46	7.33	5.79	4.80	2.54
1.65V/cell	148.4	105.0	80.7	67.4	50.0	35.8	29.4	16.7	13.1	10.5	8.67	7.48	5.87	4.90	2.57
1.60V/cell	160.0	111.5	84.9	70.9	52.4	37.1	29.5	17.3	13.4	10.8	8.92	7.61	5.92	4.94	2.58


Dimensions

T3 Terminal


Unit: mm [inches]




Discharge Characteristics

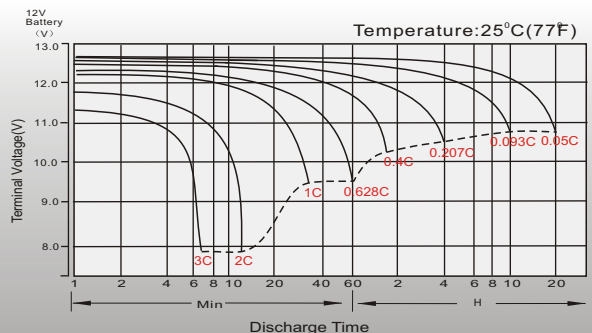


Float Charging Characteristics

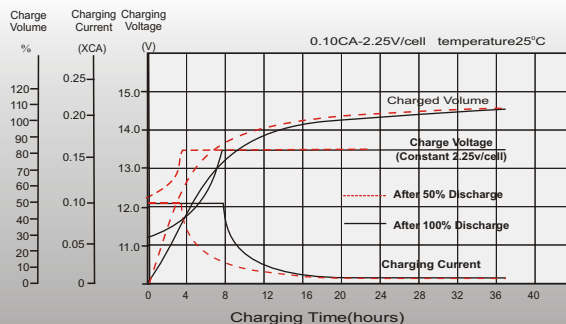


Temperature Effects in Relation to Battery Capacity

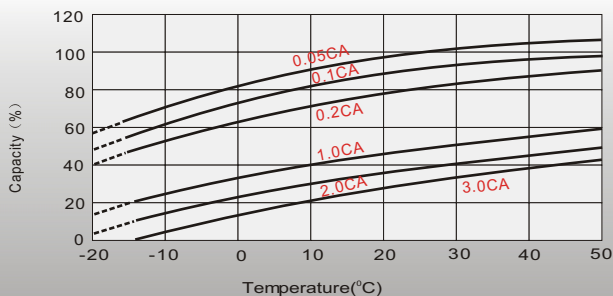


Effect of Temperature on Long Term Float Life

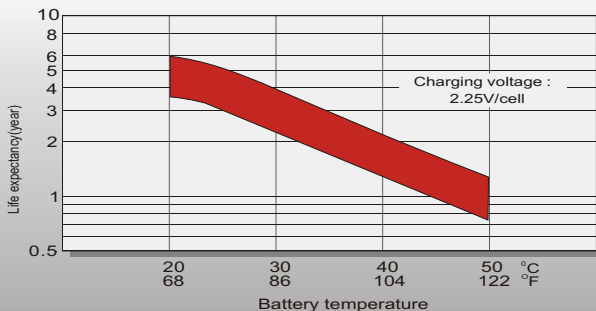

Cycle Life in Relation to Depth of Discharge

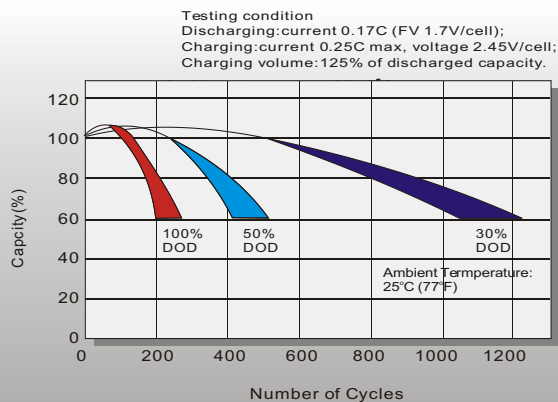

Self Discharge Characteristics

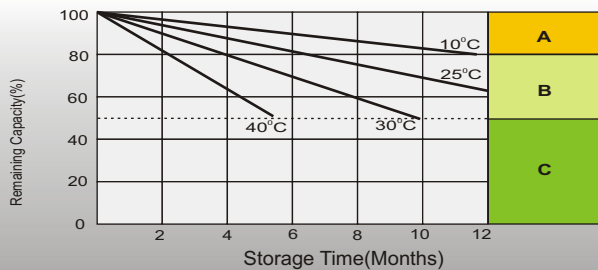

- A** No supplementary charge required (Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
3. Charged for 8-10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this is reached.

Sales Office

&]vo v v oš] •
ooš Z KČ
^]v]u vš] ò
iïòii %o}}
&]vo v
d >Wñ ò ~i• iïò òòò òòì
ru]dW}› oos ZX()
ÁÁÁX oos ZX()

SÁ v
ooš Z š o
& Æ š v ii
iòò ñi <]•š U
^Á v
d >W =òò ~i• ò òòñ òò òì
ru]dW]v}› oos ZX•
ÁÁÁX oos ZX•

vu Œl
ooš Z l^
> iŒÁ i ñ
iñii s Œo} • U
vu Œl
d >Wñ òiñ iiii
ru]dW}› oos ZX l
ÁÁÁX oos ZX l

E}ŒÉ Á Ç
^š µ } orDšŒE]v ^
i} Œv Œµ Á] v i
iïòò K•o}
E}ŒÉ Á Ç
d >W =òò iï òñ iñ ii
rD]dW}•š }•š µ }Xv}
ÁÁÁX•š µ }Xv}