

EVEREADY 996 4R25


**6V**  
Lantern



**General Information**

**Classification:** Carbon Zinc  
**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)  
 No added mercury or cadmium  
**Designation:** ANSI-908A IEC- 4R25  
**Nominal Voltage:** 6.0 volts  
**Operating Temp:** -18°C to 55°C (0°F to 130°F)  
**Typical Weight:** 600 grams  
**Typical Volume:** 492 cubic centimeters  
**Shelf Life:** 3 years at 21C  
**Terminal:** Coil Spring


**Industry Standard Dimensions**

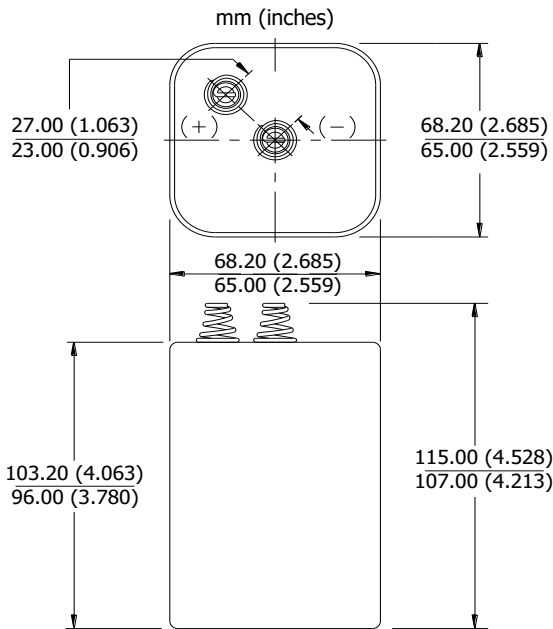

This battery shall pass freely through a cylindrical tube 82.6 diameter x 101.6 long.


**Milliamp-Hours Capacity**

Continuous discharge to 3.2 volts at 21°C

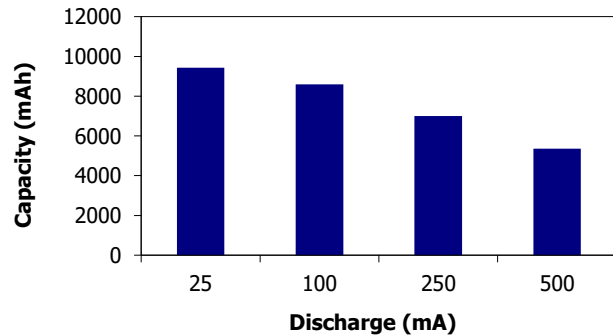


**Industry Standard Tests (21°C)**

**STEADY BURN BARRICADE**  
110 ohm 12 hrs/day

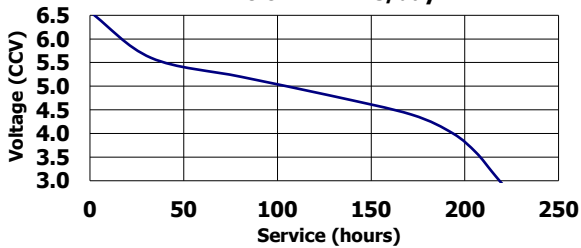

**LIGHTING**  
9.1 ohm 30 min/hour 8 hrs/day

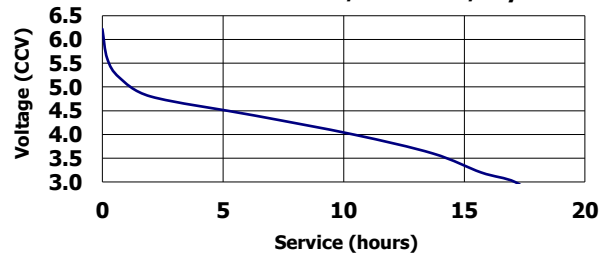

**LIGHTING**  
33 ohm 30 min/hour 8 hrs/day



**Important Notice**

This data sheet contains typical information specific to products manufactured at the time of its publication.  
**Contents herein do not constitute a warranty and are for reference only.**